


semplice®

TECHNICAL FILES

SHV302X | T1.16I.BAD

WALL MOUNTED WASHBASIN MIXER WITH 2 HOLES, INTERNAL PART

TECHNICAL DRAWING | MEASUREMENTS IN MM

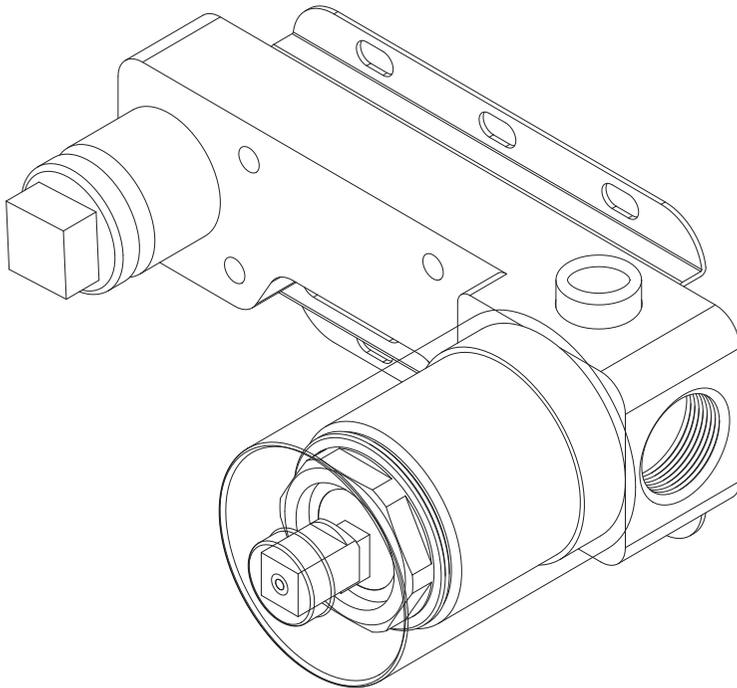

TECHNICAL FILES


SHV302X | T1.16I.BAD

WALL MOUNTED WASHBASIN MIXER WITH 2 HOLES, INTERNAL PART

COMPONENTS LIST | COMPONENTS DRAWING


T1.16I

01	FIXING PLATE	
02	SCREW	
03	SPIRIT LEVEL	
04	MONOBLOCK	
05	HALF INCH CAP	
06	CARTRIDGE	P26377
07	TECAFORM FASTENING NUT	P38629
08	PLASTIC PROTECTION	

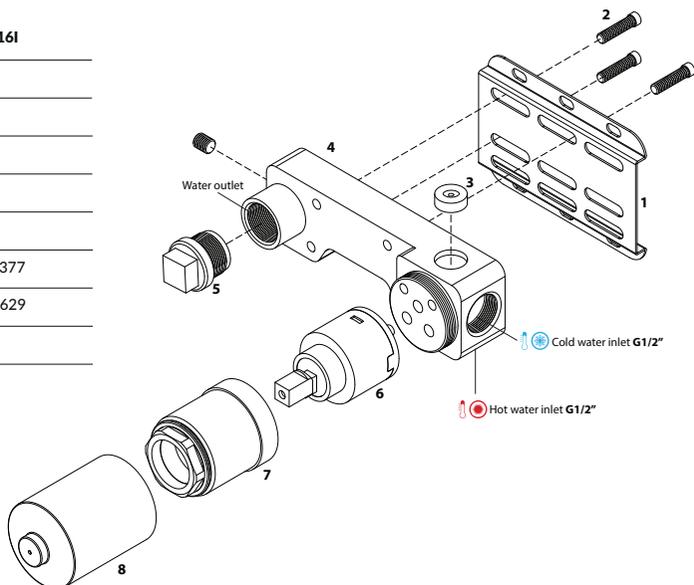

COMPATIBLE WITH:

T1.675

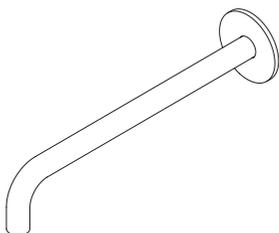

T1.16BE.SB



TECHNICAL FILES

SHV302X | T1.161.BAD

MINIMUM PRESSURE	1 BAR
MAXIMUM PRESSURE	10 BAR
RECOMMENDED WORKING PRESSURE	2-5 BAR
MAXIMUM WATER TEMPERATURE	70°/176°
MAXIMUM WATER TEMPERATURE RECOMMENDED	65°/149°
MAXIMUM INLET PRESSURE DIFFERENCE (HOT-COLD)	1.5 BAR



ASSEMBLY INSTRUCTIONS

PICTURE 1

OK



OK

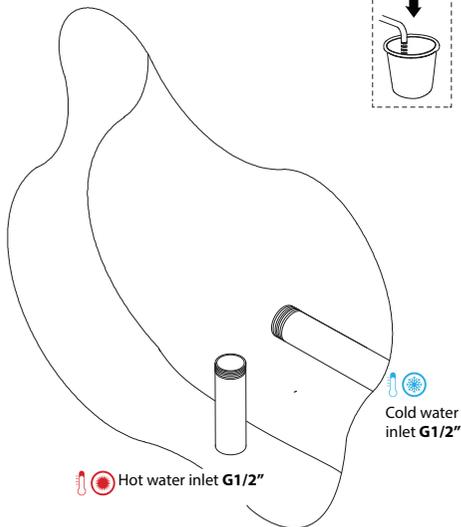


Attention!!!


Before starting the installation, the pipes must be properly cleaned, to eliminate any dirt that may cause permanent damages to the cartridge.

ASSEMBLY INSTRUCTIONS

Picture A

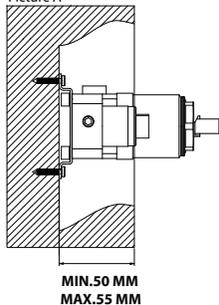

PICTURE 2



Ensure the water supply is turned off before proceeding to the mixer installation.


- 1- Verify on the picture "A" the maximum and minimum measurements for internal part installation.

Minimum 50 mm | Maximum 55 mm

- 2- Please mark the wall where the internal part T1.16I will be placed.


- 3- After marking four fixation points, drill the wall.

- 4- Screw the fixing plate with compatible bolts (not included), leaving them untight enough for the following step.

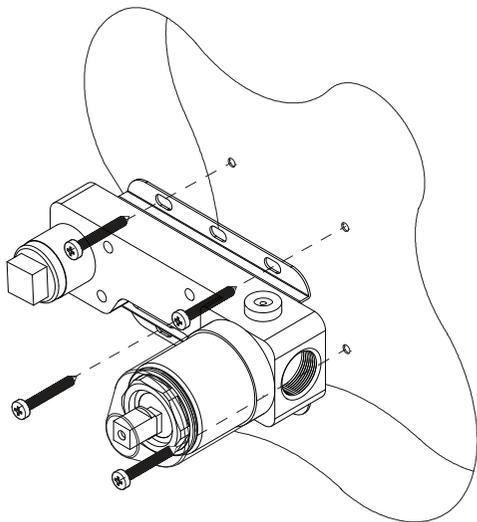

ASSEMBLY INSTRUCTIONS

PICTURE 3

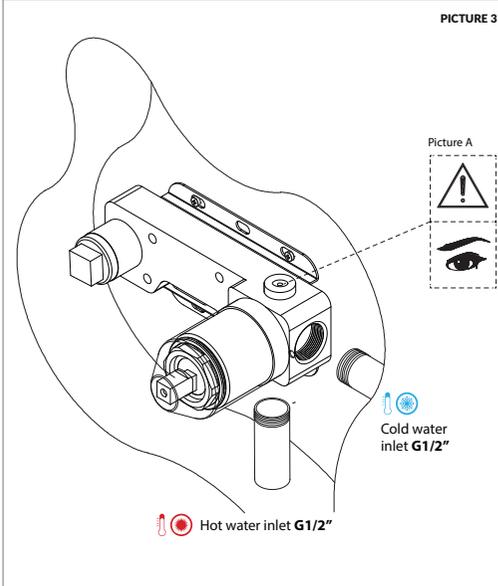

1- Confirm on the spirit level (included on the mixer seat) that the piece is levelled with the floor. After ensuring the alignment is correct, conclude the tightening of the bolts.

2- Proceed to the water connections, connecting cold and hot water to the corresponding tubes.

3- Please guarantee that these connections are done correctly before placing the coating on the wall.

4- Ensure there is access to the cartridge for future maintenance.


1- Drill the holes on the coating, for the mixer and spout.

Mixer diameter: minimum 45mm | maximum 50mm
Spout diameter: minimum 30mm | maximum 40mm


2- After completing step 1 proceed with the application of the coating.

END OF INSTALLATION

PICTURE 4

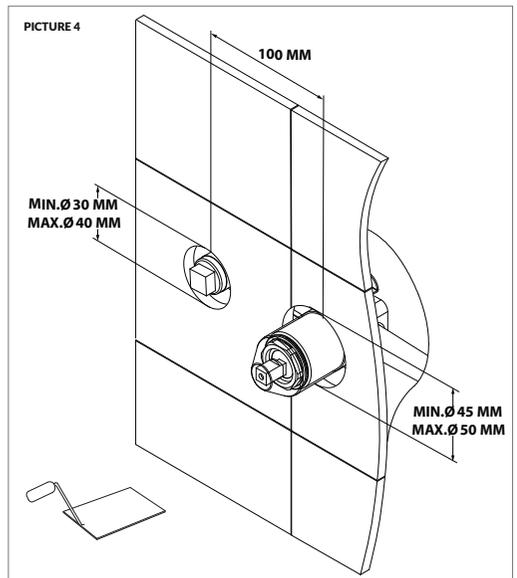

CARTRIDGE REPLACEMENT

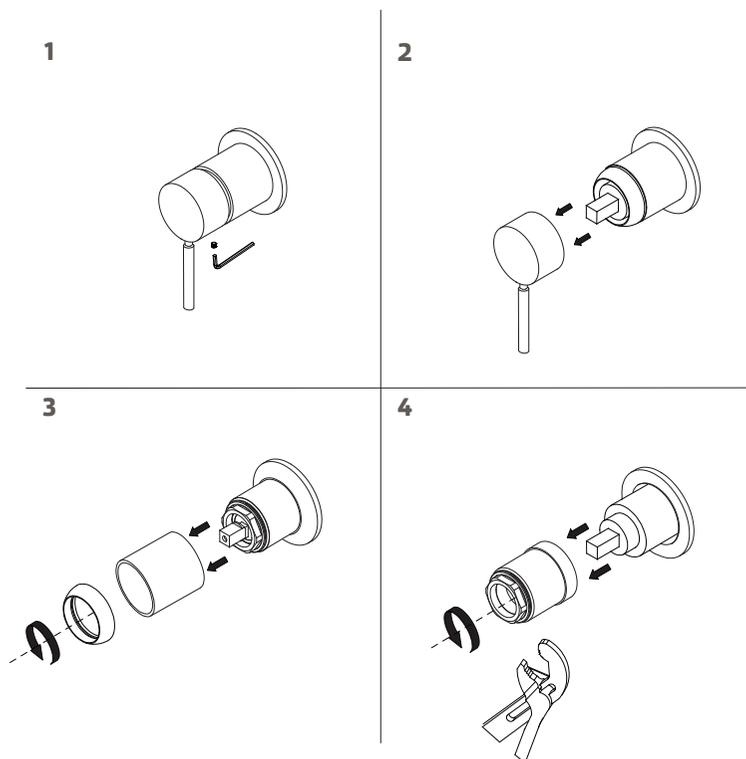

1- Unscrew the handle with the help of the allen key.

2- Remove the handle from the top of the cartridge.

3- Unscrew the cartridge concealer from the tecaform locknut, then remove the hood from the tecaform piece.

4- Unscrew the tecaform locknut with the help of a wrench. After this, you can remove the cartridge.

To apply a new cartridge, please consider the reverse procedure.

semplice®

TECHNICAL FILES

SHV302X | T1.16I.BAD

MAINTENANCE AND WARRANTY

We recommend regular maintenance of the tap, in order to assure its permanent good function. To clean the tap, please use a smooth cloth with water and neutral soap. Never use products with abrasives substances, such as chloride acid, ammonia, acetone, vinegar, bleach or abrasive sponges. The use of non-recommended products might damage permanently the surfaces, which will annul the warranty.

WARRANTY

Waterevolution guarantees all its products in case of manufacturing defects, as follows:

5 Year Warranty:

- Machining or casting faults and porosity defects;
- Cartridge and valve defects (the wear of this component depends on water quality);
- Chrome plating or PVD defects. Defects caused by improper use are excluded, please refer to the maintenance instructions.

2 year warranty:

- Powder Coating finishes. Defects caused by improper use are excluded, please refer to the maintenance instructions. Our responsibility is exclusively subject to defects originated on the production process.

The warranty does not cover components subject to wear and tear, such as O-rings, gaskets, flexible hoses and joints for connections.

ATTENTION:

Natural finishes, such as brass or stainless steel, depend entirely on the exposure to the environment and maintenance. Therefore, any stain that may appear cannot be considered a product defect. The warranty gives the customer the right to have all the parts which due to a manufacturing fault do not work correctly, replaced free of charge.

The following are excluded from the warranty:

- Items or parts which are damaged or do not work properly due to negligence in the use or wrong maintenance;
- Wrong installation;
- Intervention by unqualified people or circumstances beyond one's control.

In order to use this warranty, please keep the invoice and attach it to this document. Defective products must be sent to Waterevolution with shipping expenses borne by the sender. This warranty document and a copy of the purchase invoice must be attached to the package. The products will be promptly replaced and sent back with shipping expenses borne by Waterevolution.

semplice[®]